



# Series 801 Mighty Mouse Double-Start ACME Threads Contact Arrangements


D

## CONTACT ARRANGEMENTS

Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12
5-3	3				
6-1				1	
6-23			3		
6-4	4				
6-6	6				
6-7	7				
7-1					1
7-25			5		
7-10	10				
8-2				2	
8-28			8		
8-13	13				
8-200	4	2			
9-4				4	
9-210			10		
9-19	19				
9-200	4			2	
9-201	8	2			
10-2					2
10-5				5	
10-26	26				
10-200	12				1
10-201	4				2
10-202	8			2	
13-2					2
13-3					3
13-7				7	
13-220			20		
13-37	37				
13-200	6				2
13-201	10				2
16-5					5
16-12				12	
16-235			35		
16-55	55				
17-7					7
17-14				14	
17-241			41		
17-85	85				
21-12					12
21-22				22	
21-269			69		
21-130	130				

**Mating Face View of Pin Connector**  
(socket connector numbers are reversed)

Contact Legend  
#23⊕ #20HD⊕ #20● #16⊕ #12⊕

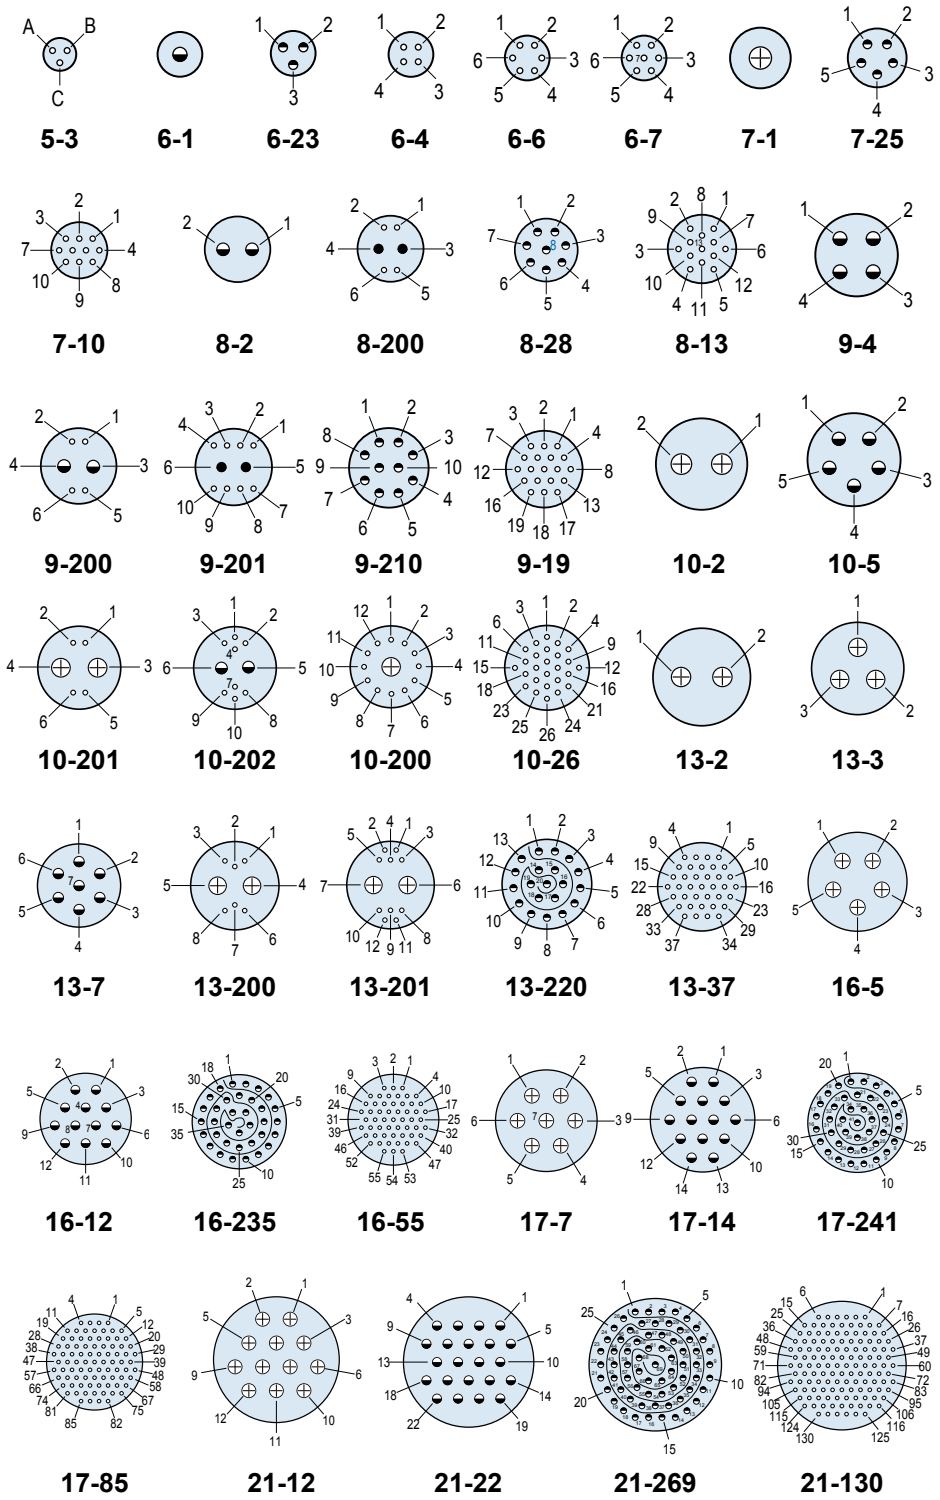

Dimensions in inches (millimeters) and are subject to change without notice.

© 2010 Glenair, Inc.

CAGE Code 06324

Printed in U.S.A.

**GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912**

www.glenair.com

**D-2**

E-Mail: sales@glenair.com

01-JANUARY-2010